

Choose Your Chassis



Micro-HD v2.0 Specs

- Up to 52,000 sqft/Charge
- 12 / 15 Gallons
- 20 26 inch decks

Applications

- Automotive Shops
- Machine Shops
- Warehouses



Mini-HD v2.0 Specs

- Up to 102,000 sqft/Charge
- 21 / 23 Gallons
- 25 29 inch decks

Applications

- Fabrication Shops
- Beverage Distribution
- Food Packaging



Mag-HD v2.0 Specs

- Up to 170,000 sqft/Charge
- 35 / 37 Gallons
- 29 34 inch decks


Applications

- Distribution
- Sports Arenas
- Aviation

Choose Your Scrub Deck



- Superior Tile & Grout Cleaning
- Great for Indoor Track Fields




- Best Performance on Irregular Floors
- Brushes Individually driven



- Chemical Free Stripping
- Reduce Slip & Fall Potential
- 70% Reduction in Water Usage
- VCT Prep & Recoat

Choose Your Controller




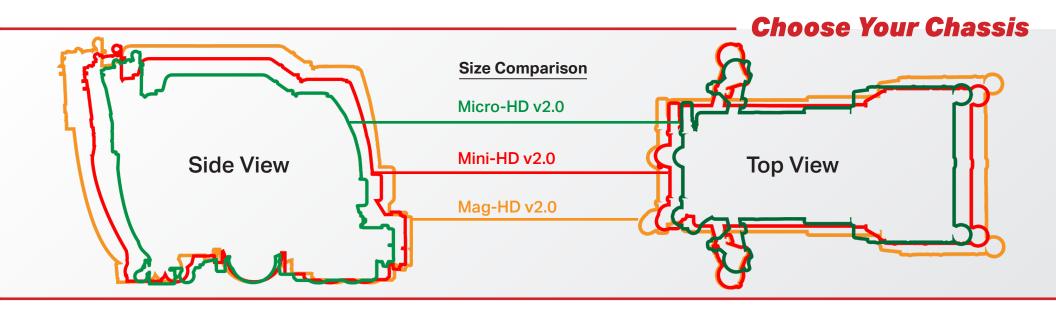

- 1 Polypropylene: Black / Medium Light
- (2) Nylon: White / Light Soft
- (3) Tampico: Tan / Soft
- 4 Tufted Pad Driver: Red / Variety Pads
- (5)* Neoprene Pad Driver: Black / Variety Diamond Pucks
- (6)* Super Grit: Orange / Extreme Rough
- 7 Tough Grit: Black / Very Rough
- (8) Midi Grit: Blue / Rough
- 9 Light Grit: Grey / Medium

Choose Your Brush

^{*}Not offered on Cylindrical Brushes

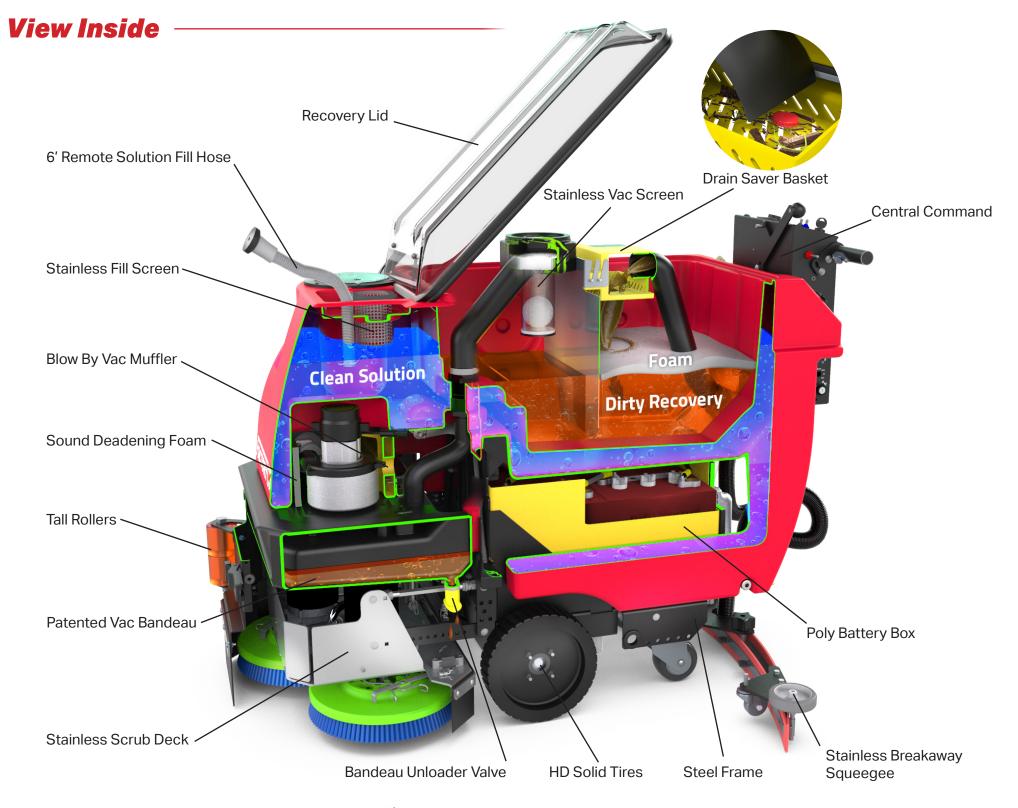

Choose Your Options



Antimicrobial Sanitation Package

- Clean With Chemical, or Aqueous Ozone
- Spray Wand For Hard To Reach Places
- Antimicrobial Tank
- Dedicated 3 Gallon Disinfectant Tank



Scrub And Vac Wand / Spray Jet

- Brush for scrubbing, squeegee for water pickup
- Clean restrooms and under tables
- Pre soak the floor before scrubbing
- Rinse out recovery tank



Onboard Charger / AGM Batteries

- Convenient Charging anywhere
- Logs most recent charge events
- Maintenance Free Batteries
- Spill Proof Housing



Stainless Frame

- Stainless Metal prolongs machine life
- Guards against moisture and chemical
- Great for corrosive applications (fertilizer, salt spreading for DOT)



Suds / ZERO3

- Automatic portion control with Suds
- Cleaning with chemical free Aqueous Ozone



Metal Lid / HD Wheels / Disk Shroud

- Heavy Duty Steel Lid
- Steel Hub HD Wheels
- Removable Disk Shroud

You Be The Judge

 Vac Motor Batteries Deck Actuator Solution Valve • Filters-Screens

Soap Drain

Battery Box Drain

Unloader Valve

Vac Switch

Scrub Motors



Tip Back Tank

Our designers all have 25+ years of experience and recognize cleaning equipment will eventually require service.


- Tanks tip back without tools, providing easy top side access to all important service items.
- Quick access allows the technician to trouble shoot from their feet and make repairs quickly, with less chance of creating unintended problems from disassembling 5 items to get to the 1 that failed.



Large Clear Lid

Any customer who has previously owned and operated cleaning equipment will appreciate the value of full time viewing of the dirty water recovery tank.


- This provides the operator with a real time view of the dirty water level, foam, debris tray, the vacuum's white dust filter and more.
- The fully accessible recovery tank is easily our most significant feature for cost reduction. Open the lid to clean out the recovery tank, eliminating odors and other contaminants which can become airborne and inhaled by employees.

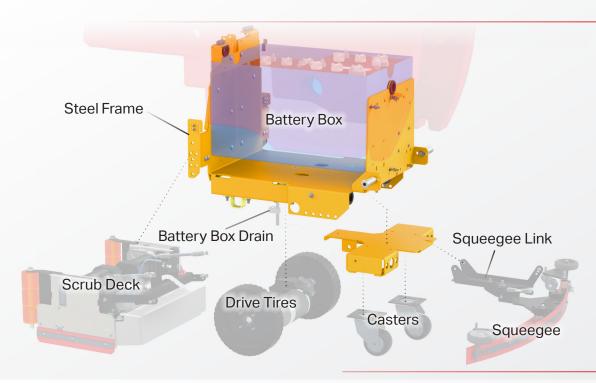

Steel Frame

We spend the extra time and money to through-bolt with stainless fasteners for longevity and service ease in the future. Some of our larger machines have 600-lbs in batteries in a full height poly liner, supported by the steel frame.

- All assemblies mount directly to the 7-ga (3/16" thick) steel frame, instead of plastic parts that will fatigue in time.
- Accidental damage to casters, or over tensioning the frame during transport will not damage our tanks since we don't bolt collision points to the poly tank.

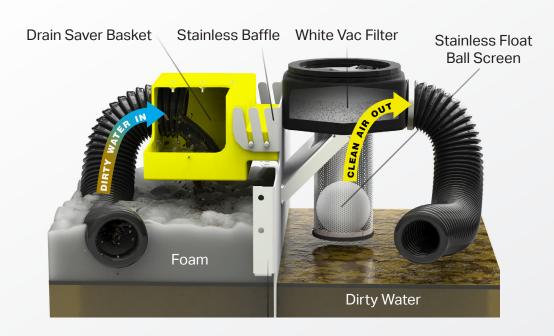


Baffle System

Another feature you'll not find elsewhere is our stainless baffle wall that controls foam in the recovery tank.


- The dirty water passes into our drain saver basket, and then fills up the rear side of the baffle such that the foam doesn't migrate to the front where the stainless screen and ball float operates.
- The stainless screen and white vacuum filter offer additional protection. These are the first of several steps taken to ensure good airflow (squeegee performance) and protecting the vacuum motor from moisture.

You Be The Judge

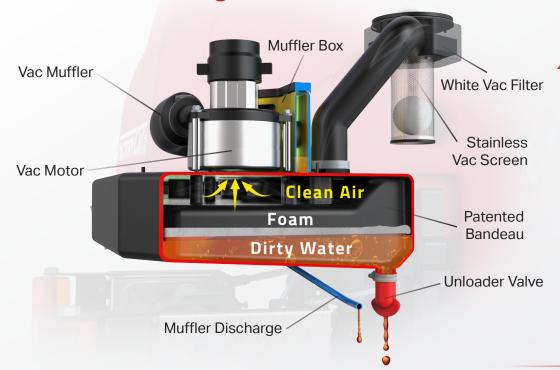

Patented Bandeau System

- This design was so unique and meaningful it earned a US Patent, and something you won't find elsewhere.
- The black bandeau is vacuumized and holds 1-gallon of foam or dirty water away from the vac motor, backing up the primary filters and balls screens.
- The "unloader" valve automatically drains off any residual water when vac is OFF.
- The yellow muffler box both reduces the noise and also directs any digested water out a tube, to alert the operator to a problem.

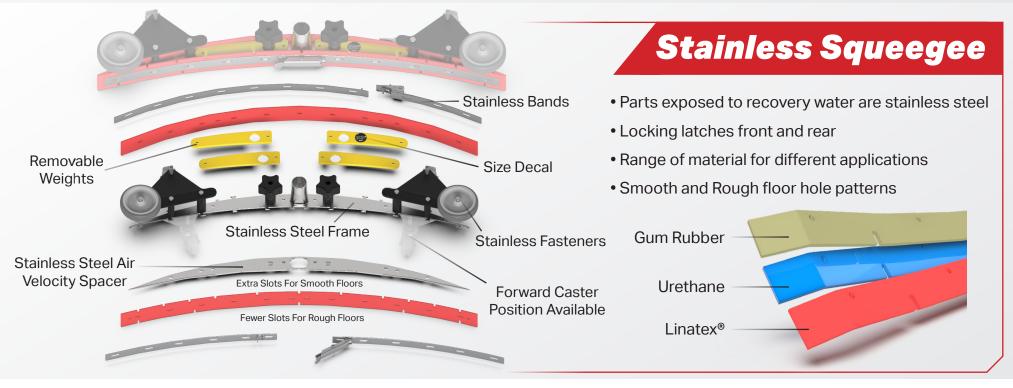

Applications



Automotive

Automotive dealerships and large Truck service centers are some of the toughest applications we've run across. Our equipment offers the maneuverability and performance to clean showrooms full of new cars on expensive floors. The same machine can survive use around steel car lifts, concrete edging and metal floor grates.



Aviation

These customers appreciate reliability and quality as much as anyone. Our scrubbers collect floor debris and prevent FOD better than others, and the compact size combines productivity with good sight lines for operating close to expensive aircraft. Several aircraft manufacturers and FBO's trust our equipment to clean their assembly plants and service centers.



Warehouse

Large distribution centers need maximum scrub path, tank capacities and run time, but in a footprint that allows for easy u-turns and cleaning close to racking. Our heavy duty products can withstand the expected collisions and have excellent water control so your stored product is protected. Our scrubbers offer superior productivity and durability.

Applications



Food & Beverage

Customers who deal with food and beverage manufacturing, processing and distribution appreciate our fully cleanable recovery tank and performance on the floor. Cleaning the reservoir that contains the dirty water eliminates bad odors and the transfer of various contaminants. Our optional onboard ozone system and remote hand tools takes this to an even higher level.



Manufacturing

The process of cutting, welding, assembling and otherwise "building" stuff can be a tough application. Even with the latest production equipment it can be an environment demanding heavy duty products. Our equipment is built to take abuse and is easily serviced when necessary.



Sports Arena

Applications that typically combine large open areas where productivity is important, with smaller aisles or elevators to access different locations. Our varied scrub head types and brushes allow customers broad flexibility for cleaning wood, tile, rubber, concrete, painted and other highly valued surfaces.

Specifications



	Micro-HD v2.0	
BODY CONSTRUCTION / DIMENSIONS		
Chassis Construction:	3/16" Steel (4.8 mm) Powder Coated	
Front Wheels (Ø x Width)	(2x) 8" x 2" ([2x] 20 x 5 cm) - Solid Black	
Rear Casters (Ø x Width):	(2x) 2.5" x 1.38" ([2x] 6 x 4 cm) - Non-Marking Grey	
Size $(L \times W \times H)$:	45" × 21" × 39" (114 × 53 × 99 cm)	
Weight (w/o Batteries):	278 - 328 lbs (126 - 149 kg)	
Weight (w/ 210 ah Batteries):	410 - 460 lbs (186 - 209 kg)	
BRUSH / PAD SYSTEM		
Disk Dimensions:	20" - (1×) 20" Ø (51 - [1×] 51 cm)	
Includes Jaws with Rollers for Wall Protection	26" - (2x) 13" Ø (66 - [2x] 33 cm)	
Disk Motor:	20" (1x) 0.75 hp/200 rpm(51 cm [1x] 551 watts)	
	26" - (2x) 0.75 hp/ 270 rpm(66 cm [2x] 551 watts)	
Optional Motor Upgrade:	(2×) 1.0 hp / 350 rpm ([2×] 735 watts)	
Cylindrical Dimensions: 6" Ø Brush	25" - (2x) 6" x 23" (64 - [2x] 15.2 x 58 cm)	
Cylindrical Motor:	(2x) 0.75 hp / 270 rpm (2x] 551 watts)	
Cylindrical Brush Speed:	750 rpm	
Orbital Dimensions:	20" × 14" (51 × 35.6 cm) 24" × 14" (61 × 35.6 cm)	
Orbital Motor:	1.0 hp (735 watts) 2,500 rpm	
Brush Down Pressure:	Up to 175 lbs (79 kg) / 500 lbs (227 kg) Actuator Rating	
POWER SYSTEM		
System Voltage/Amps	24 VDC / 130 ah WET	
Optional Battery: *Includes Onboard Charger	150 ah WET / 115 ah AGM* / 140 ah AGM*	
Run Time:	Up to 2.5 Hours**	



**Based on continuous scrubbing run	times.	
DRIVE SYSTEM		
Power:	0.75hp - All Gear / Sealed (551 watts) & Pad Assist	
Forward Speed:	0 - 230 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)	
Scrubbing Speed:	0 - 184 ft/min / 0 - 2 mph (0 - 56 m/min / 0 - 3 km/h)	
Reverse Speed:	0 - 130 ft/min / 0 - 1.5 mph (0 - 40 m/min / 0 - 2 km/h)	
SOLUTION / RECOVERY SYSTEMS		
Solution Tank Capacit	y: 12 Gallons (45 liters) - w/ Graduated Site Tube	
Solution Flow / Filter:	0 - 0.5 GPM / Stainless Inline (0 - 2 LPM)	
Recovery Tank Capac	ity: 15 Gallons (56.8 liters) - 1.5" Ø Drain Hose	
Small Tank Capacity:	N/A	
Demisting Chamber:	1.25 Gallons (4.7 liters)	
Drain Saver:	30 cubic inches (492 cubic cm)	
Vacuum Power	0.8 hp / 3 Stage / 5.7" Ø (588 watts)	
(Water Lift / Airflow):	68" / 72 cfm (173 cm / 2 cm)	
GENERAL		
Productivity - Theoret	cal: Up to 26,000 sqft/hr (2,415 sqm)***	
***Based off of ISSA 2010 Cleaning T	mes	

Up to 12,059 sqft/hr (1,120 sqm)***



	Mini-HD v2.0	
BODY CONSTRUCTION / DIM	ENSIONS	BODY CONSTRUCTION / DI
Chassis Construction:	3/16" Steel (4.8 mm) Powder Coated	Chassis Construction:
Front Wheels (Ø × Width)	(2x) 10" x 2.5" ([2x] 25.4 x 6 cm) - Solid Black	Front Wheels (Ø x Width):
Rear Casters (Ø x Width):	$(2\times)$ 4" \times 2" $((2\times)$ 10 \times 5 cm) - Non-Marking Grey	Rear Casters (Ø x Width):
Size $(L \times W \times H)$:	52" × 22" × 40" (132 × 55 × 101 cm)	Size $(L \times W \times H)$:
Weight (w/o Batteries):	393 - 443 lbs (178 - 201 kg)	Weight (w/o Batteries):
Weight (w/ 210 ah Batteries):	625 - 675 lbs (284 - 306 kg)	Weight (w/ 315 ah Batteries):
BRUSH / PAD SYSTEM		BRUSH / PAD SYSTEM
Disk Dimensions:	26" - (2×) 13" Ø (66 - [2×] 33 cm)	Disk Dimensions:
Includes Jaws with Rollers for Wall Protection	28" - (2×) 14" Ø (71 - [2×] 35 cm)	Includes Jaws with Rollers for Wall Protection
Disk Motor:	(2x) 0.75 hp / 270 rpm ([2x] 551 watts)	Disk Motor:
Optional Motor Upgrade:	(2x) 1.0 hp / 350 rpm ((2x) 735 watts)	Optional Motor Upgrade:
Cylindrical Dimensions: 6" Ø Brush	25" - (2×) 6" × 23" (63 - [2×] 15 × 58 cm) 29" - (2×) 6" × 27" (73 - [2×] 15 × 68 cm)	Cylindrical Dimensions: 6" Ø Brush
Cylindrical Motor:	25" - (2×) 0.75 hp ([2×] 551 watts) 29" - (2×) 1.0 hp ([2×] 735 watts)	Cylindrical Motor:
Cylindrical Brush Speed:	750 rpm	Cylindrical Brush Speed:
Orbital Dimensions:	24" × 14" (61 × 35 cm) 28" × 14" (71 × 35 cm)	Orbital Dimensions:
Orbital Motor:	1.0 hp (735 watts) 2,500 rpm	Orbital Motor:
Brush Down Pressure:	Up to 175 lbs (79 kg) / 500 lbs (227 kg) Actuator Rating	Brush Down Pressure:
POWER SYSTEM		POWER SYSTEM
POWER SYSTEM System Voltage/Amps	24 VDC / 210 ah WET	System Voltage/Amps
	24 VDC / 210 ah WET 245 ah WET / 250 ah AGM*	
System Voltage/Amps Optional Battery:		System Voltage/Amps Optional Battery:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: "Based on continuous scrubbing run times.	245 ah WET / 250 ah AGM*	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: "Based on continuous scrubbing run times.
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: "Based on continuous scrubbing run times. DRIVE SYSTEM	245 ah WET / 250 ah AGM* Up to 3.5 Hours**	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: "Based on continuous scrubbing run times. DRIVE SYSTEM
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: 'Based on continuous scrubbing run times. DRIVE SYSTEM Power:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: "Based on continuous scrubbing run times. DRIVE SYSTEM Power:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: 'Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS	System Voltage/Amps Optional Battery: *Includes Onboard Charger Run Time: **Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - W/ Graduated Site Tube	System Voltage/Amps Optional Battery: *Includes Onboard Charger Run Time: **Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity: Solution Flow / Filter:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - w/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: 'Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - w/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM) 23 Gallons (87 liters) - 1.5" Ø Drain Hose	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: 'Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: 'Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Scrubbing Speed: Solution / BECOVERY SYS Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - w/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM) 23 Gallons (87 liters) - 1.5" Ø Drain Hose 16 Gal (60 liters) Solution 17 Gal (64 liters) Recovery	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - w/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM) 23 Gallons (87 liters) - 1.5" Ø Drain Hose 16 Gal (60 liters) Solution 17 Gal (64 liters) Recovery 1.25 Gallons (4.7 liters)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: 'Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber: Drain Saver:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - w/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM) 23 Gallons (87 liters) - 1.5" Ø Drain Hose 16 Gal (60 liters) Solution 17 Gal (64 liters) Recovery 1.25 Gallons (4.7 liters) 30 cubic inches (492 cubic cm)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber: Drain Saver:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - w/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM) 23 Gallons (87 liters) - 1.5" Ø Drain Hose 16 Gal (60 liters) Solution 17 Gal (64 liters) Recovery 1.25 Gallons (4.7 liters)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber:
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber: Drain Saver: Vacuum Power	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - W/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM) 23 Gallons (87 liters) - 1.5" Ø Drain Hose 16 Gal (60 liters) Solution 17 Gal (64 liters) Recovery 1.25 Gallons (47 liters) 30 cubic inches (492 cubic cm) 0.8 hp / 3 Stage / 5.7" (588 watts)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber: Drain Saver: Vacuum Power
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: 'Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber: Drain Saver: Vacuum Power (Water Lift / Airflow):	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - W/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM) 23 Gallons (87 liters) - 1.5" Ø Drain Hose 16 Gal (60 liters) Solution 17 Gal (64 liters) Recovery 1.25 Gallons (47 liters) 30 cubic inches (492 cubic cm) 0.8 hp / 3 Stage / 5.7" (588 watts)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: "Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber: Drain Saver: Vacuum Power (Water Lift / Airflow):
System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: ''Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SYS Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber: Drain Saver: Vacuum Power (Water Lift / Airflow): GENERAL Productivity - Theoretical:	245 ah WET / 250 ah AGM* Up to 3.5 Hours** 0.75hp - All Gear / Sealed (559 watts) 0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h) 0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h) 0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h) TEMS 21 Gallons (79 liters) - W/ Graduated Site Tube 0 - 0.7 GPM / Stainless Inline (0 - 2 LPM) 23 Gallons (87 liters) - 1.5" Ø Drain Hose 16 Gal (60 liters) Solution 17 Gal (64 liters) Recovery 1.25 Gallons (4.7 liters) 30 cubic inches (492 cubic cm) 0.8 hp / 3 Stage / 5.7" (588 watts) 68" / 72 cfm (173 cm / 2 cm)	System Voltage/Amps Optional Battery: 'Includes Onboard Charger Run Time: 'Based on continuous scrubbing run times. DRIVE SYSTEM Power: Forward Speed: Scrubbing Speed: Reverse Speed: SOLUTION / RECOVERY SY Tank Solution Capacity: Solution Flow / Filter: Tank Recovery Capacity: Small Tank Capacity: Demisting Chamber: Drain Saver: Vacuum Power (Water Lift / Airflow): GENERAL Productivity - Theoretical:



	Mag-HD v2.0			
BODY CONSTRUCTION / DIMENSIONS				
Chassis Construction:	3/16" Steel (4.8 mm) Powder Coated			
Front Wheels (Ø x Width):	(2×) 12" × 2.75" ([2×] 30 × 7 cm) - Solid Black			
Rear Casters (Ø x Width):	(2×) 5" × 2" ([2×] 12.7 × 5.1 cm) - Non-Marking Grey			
Size $(L \times W \times H)$:	55" × 26" × 40" (139 × 66 × 101 cm)			
Weight (w/o Batteries):	441 - 481 lbs (200 - 218 kg)			
Weight (w/ 315 ah Batteries):	775 - 825 lbs (352 - 374 kg)			
BRUSH / PAD SYSTEM				
Disk Dimensions: Includes Jaws with Rollers for Wall Protection	30" - (2x) 15" Ø (76 - [2x] 38 cm) 32" - (2x) 16" Ø (82 - [2x] 41 cm) 34" - (2x) 17" Ø (86 - [2x] 43 cm)			
Disk Motor:	(2×) 1.0 hp / 350 rpm ((2×) 735 watts)			
Optional Motor Upgrade:	(2x) 1.0 hp / 350 rpm ([2x] 735 watts)			
Cylindrical Dimensions:	29" - (2x) 6" x 27" (73 - [2x] 15 x 68 cm)			
6" Ø Brush	33" - (2x) 6" x 31" (83 - [2x] 15 x 78 cm)			
Cylindrical Motor:	(2x) 1.0 hp ((2x) 735 watts)			
Cylindrical Brush Speed:	750 rpm			
Orbital Dimensions:	28" × 14" (71 × 35 cm) 32" × 14" (81 × 35 cm)			
Orbital Motor:	1.0 hp (735 watts) 2,500 rpm			
Brush Down Pressure:	Up to 185 lbs (84 kg) / 500 lbs (227 kg) Actuator Rating			
POWER SYSTEM				
System Voltage/Amps	24 VDC / 310 ah WET			
Optional Battery:	360 ah WET / 335 ah AGM*			
*Includes Onboard Charger				
Run Time:	Up to 5.0 Hours**			
**Based on continuous scrubbing run times.				
DRIVE SYSTEM				
Power:	0.75hp - All Gear / Sealed (559 watts)			
Forward Speed:	0 - 290 ft/min / 0 - 3.3 mph (0 - 88 m/min / 0 - 5 km/h)			
Scrubbing Speed:	0 - 229 ft/min / 0 - 2.6 mph (0 - 70 m/min / 0 - 4 km/h)			
Reverse Speed:	0 - 202 ft/min / 0 - 2.3 mph (0 - 61 m/min / 0 - 4 km/h)			
SOLUTION / RECOVERY SYST	-			
Tank Solution Capacity:	35 Gallons (132 liters) - w/ Graduated Site Tube			
Solution Flow / Filter:	0 - 1.0 GPM / Stainless Inline (0 - 4 LPM)			
Tank Recovery Capacity:	37 Gallons (140 liters) - 1.5" Ø Drain Hose			
Small Tank Capacity:	32 Gal (121 liters) Solution 33 Gal (125 liters) Recovery			
Demisting Chamber:	1.25 Gallons (4.7 liters)			

30 cubic inches (492 cubic cm)

68" / 72 cfm (173 cm / 2 cm)

0.8 hp / 3 Stage / 5.7" (588 watts)

Up to 33,932 sqft/hr (3,152 sqm)***

Up to 15,784 sqft /hr (1,466 sqm)***

Productivity - Practical:

***Based off of ISSA 2010 Cleaning Times





We produce heavy duty equipment and require a good amount of thick steel in the construction. We use a combination of Stainless 304 (Austenitic 18/8) and mild steel with e-coating + powder paint for corrosion resistance. Steel fabrication is done in-house or from local suppliers with specialty equipment.



Complex shapes that allow for our "tank-in-tank" design are best achieved with in-house equipment. We own multiple dual station rotational molding machines that allow us to produce finished parts from raw plastic. Producing consistently higher

quality parts, and respond quickly to sales spikes.



Our team has designed and engineered over 100 unique machines. Each new generation of machines evolve from prior designs to retain the strengths and correct any weakness. From the first pencil sketch we focus on durability, serviceability, performance, productivity, specifications, and value.