

WE KNOW CLEAN™



FACTORYCAT®

MicroMini

Walk-Behind Scrubber for Quality Results

17-26 INCH WORKING
WIDTHS AVAILABLE

Made in the USA 

COMPACT DESIGN
EFFECTIVE CLEANING



Machine Control Panel uses off-the-shelf toggle and marine duty switches and features universal icons which simplifies training.



Squeegee Adjustments made simple with quick change squeegee latch allows tool-less maintenance and 4-sided squeegee blade.



Front Fill System features a retractable hose for easy filling on standard sink-faucets and a stainless screen for bucket filling.



Oversized Vacuum Screen Shut-Off quickly arrests overfill issues to protect the Vacuum Motor.



High Performance motors and down pressure provides an unmatched standard of cleaning.


The Factory Cat MicroMini Scrubber is known for its simple design and durable construction, offering unmatched value for the customer. The MicroMini Walk Behind Floor Scrubber comes equipped with a Traction drive which includes a powerful all-gear transaxle for climbing ramps and max operator ease or a Pad Assist version.

While keeping with the constant durability that FactoryCat machines have to offer, your operators will find the MicroMini Floor Scrubber Dryer easy to maneuver into tight areas, and simple to service. The deck is protected by steel guards and large polyurethane rollers to keep the unit from marking walls.



Total Access to Components

- 1 Inspect Vacuum Motor
- 2 Service Batteries
- 3 Inline Solution Filter
- 4 Inspect Scrub Motors
- 5 Vacuum Screen & Filter
- 6 Micro Drain Saver Basket



Reduce costly repairs associated with clogged floor drains with our Micro Drain Saver Basket.



Efficient, Effective, and Driven by Results

The Factory Cat MicroMini is your perfect choice when it comes to professional cleaning results in mid to large areas. These machines are tailor-made for applications in areas such as:

- Fabrication Shops
- Machine Shops
- Manufacturing
- Aviation
- Beverage Distribution
- Warehouses
- Automotive Shops
- Food Packaging
- Sports Arenas
- Schools & Universities

View Inside the Factory Cat MICROMINI

Designed with Attention to Detail

Isolated Vac Motor
Quiet Operation


Front Fill System
Ease of Use

Transparent Lid
Gives operator view into tank

Stainless Drain Saver
Eliminate Clogged Drains

Adjustable Stainless Handlebar
Operator Comfort

Tank Baffle Separator
Protect Vac Motor from Foam

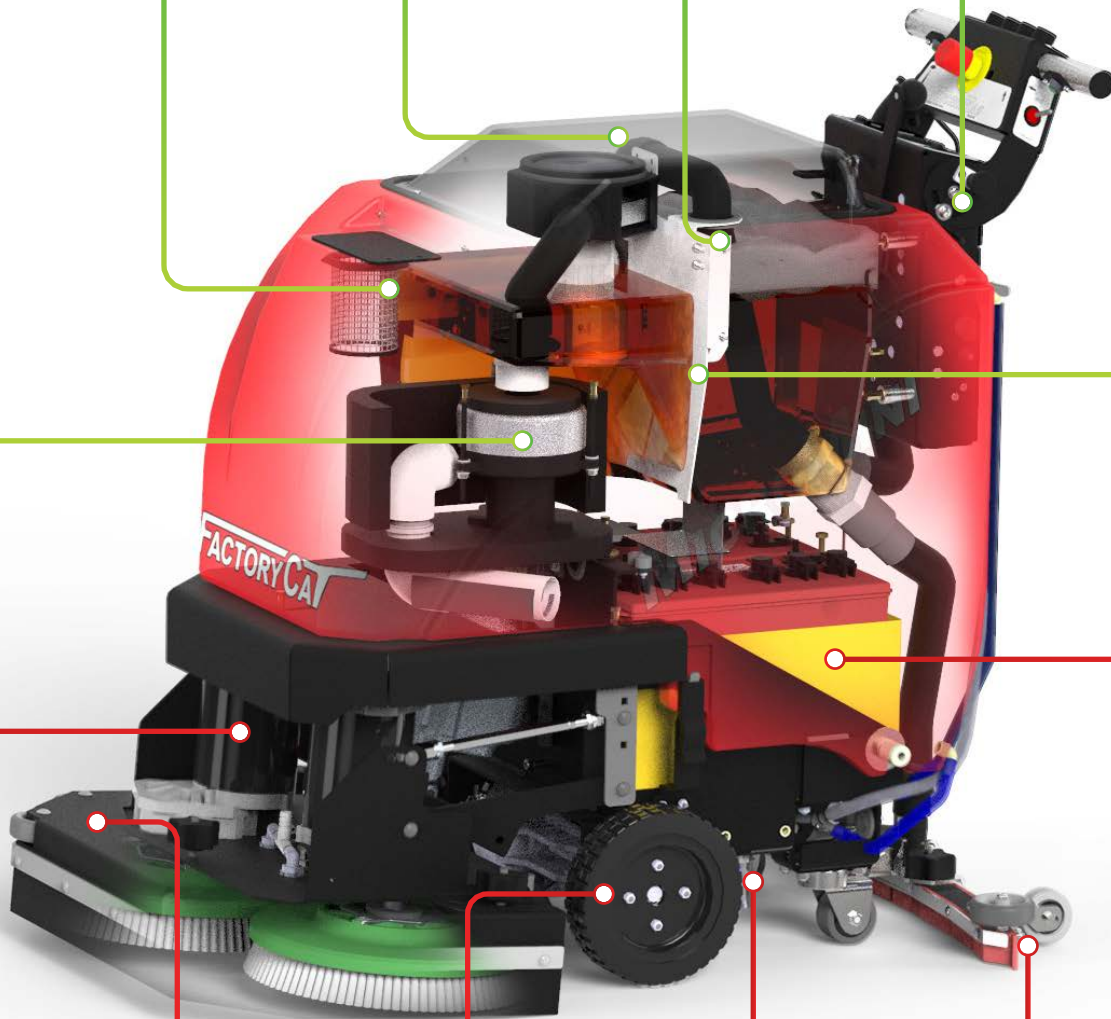

American Made Motors
Performance & Long Life


Low Profile Shroud
Protects Scrub Deck

HD Solid Tires
Eliminates Skid Marks

Stainless Filter
Filtering Your Solution

Squeegee HD Wheels & Rollers
Protects Scrub Deck

Poly Battery Box w/ Drain
Battery Protection

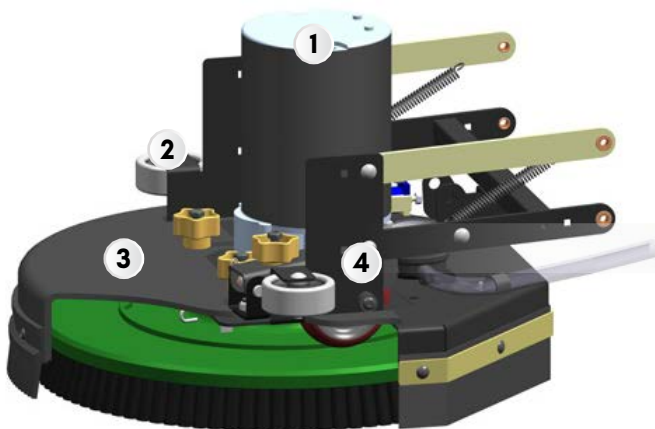

- 1 HD Motor | Better Performance
- 2 Corner Rollers | Non-Marking
- 3 Thick Steel Design | 1/4" Thick for Durability
- 4 Removable Shroud | Protects Deck

Disk Benefits

- Extensive Brush / Pad Selection
- Lowest Maintenance Cost
- Gimballed Drivers Improves Cleaning On Irregular Floors
- Brushes Individually Driven For Unmatched Performance

Technical Data

FACTORY CAT MICROMINI AT A GLANCE

BODY CONSTRUCTION / DIMENSIONS

Tank Material:	Poly 5/16" (7.9 mm)
Chassis Construction:	1/8" Steel (3.2 mm) Powder Coated Steel
Front Wheels (Diameter x Width):	(2x) 8" x 2" ([2x] 20.3 x 5.1 cm) - Solid Black
Rear Casters (Diameter x Width):	(2x) 2.5" x 1.38" ([2x] 6.4 x 3.5 cm) - Non-Marking Grey
Size (L x W x H):	42" x 21" x 39" (106.7 x 53.3 x 99.1 cm)
Weight (w/o Batteries):	215 - 315 lbs (97.5 - 142.9 kg)
Weight (w/ 130 ah Batteries):	380 - 480 lbs (172.4 - 217.7 kg)

BRUSH / PAD SYSTEM

Disk Dimensions:	17" - (1x) 17" Ø (43.2 - [1x] 43.2 cm) 20" - (1x) 20" Ø (50.8 - [1x] 50.8 cm) 26" - (2x) 13" Ø (66.1 - [2x] 33.1 cm)
Disk Motor:	0.75 hp / 200 rpm ([1x] 559 watts)
Disk Brush Speed:	200 rpm
Brush Down Pressure:	Up to 100 lbs (45.4 kg) / 500 lbs (226.8 kg) Actuator Rating

POWER SYSTEM

System Voltage:	24 VDC
Standard Battery:	130 ah WET
Optional Battery:	150 ah WET / 115 ah AGM
Run Time:	Up to 3.5 Hours*
**Run times are based on continuous scrubbing run times.	
Charger:	120 VAC / 60 Hz Input - 24VDC / 12 amp Output

DRIVE SYSTEM

Power:	0.75hp - All Gear / Sealed (559 watts) & Pad Assist
Forward Speed:	0 - 230 ft/min / 2.6 mph (0 - 70 m/min / 4 km/h)
Scrubbing Speed:	0 - 184 ft/min / 2 mph (0 - 56 m/min / 3 km/h)
Reverse Speed:	0 - 130 ft/min / 1.5 mph (0 - 40 m/min / 2 km/h)

SOLUTION / RECOVERY SYSTEMS

Solution Tank Capacity:	10 Gallons (37.9 liters) - w/ Graduated Site Tube
Solution Flow / Filter:	0 - 0.5 GPM / Stainless Inline (0 - 2 LPM)
Recovery Tank Capacity:	10 Gallons (37.9 liters) - 1.5" diameter Drain Hose
Demisting Chamber:	1.25 Gallons (4.7 liters)
Drain Saver:	30 cubic inches (491.6 cubic cm)
Vacuum Power:	0.8 hp / 3 Stage (640 watts)
Vacuum Specs (Water Lift / Airflow):	70" / 70 cfm (177.8 cm / 2 cm/min)
Squeegee:	Curved w/ 2-sided Rear Blade 17D - 30" (76.2 cm) 20D & 26D - 34" (86.4 cm) Optional - 26" & 34" (66 cm & 86.4 cm)

GENERAL

Cleaning Width:	17", 20", 26" - Disk (43 & 50.1, 66.1 cm)
Sound Levels:	65 dBA**
***Decibel levels for Disk per ISO 11201 as recommended by the American Association of Cleaning Equipment Manufacturers & OSHA	
Productivity - Theoretical:	Up to 15,748 sqft (1,463 sqm)***
***Productivity is based off of ISSA 2010 Cleaning Times	
Productivity - Practical:	Up to 7,308 sqft (679 sqm)***
***Productivity is based off of ISSA 2010 Cleaning Times	

A FAMILY COMPANY SINCE 1967



WE KNOW CLEAN™



EQUIPMENT



PARTS



RENTALS



SERVICE



SUPPLIES

SWEeperLAND.COM

Corporate Headquarters | 4713 Gettysburg Road | Mechanicsburg, PA 17055

Contact Us Today: 1-800-626-7835